















## ■ 割草機配件-割草刀片 TRIMMER BLADE

刀片 Blade	規格 Specification	刀片 Blade	規格 Specification
	2T-菱形Diamond Length:10" / 255mm Width:70mm Thickness:1.6mm Bore:25.4mm		2T-菱形Diamond Length:12" / 305mm Width:70mm Thickness:1.6mm Bore:25.4mm
	2T-菱形Diamond Length:10" / 255mm Width:90mm Thickness:1.6mm Bore:25.4mm		2T-菱形Diamond Length:12" / 305mm Width:90mm Thickness:1.6mm Bore:25.4mm
	2T-方形Rectangle Length:10" / 255mm Width:70mm Thickness:1.6mm Bore:25.4mm		2T-方形Rectangle Length:12" / 305mm Width:70mm Thickness:1.6mm Bore:25.4mm
	2T-方形Rectangle Length:10" / 255mm Width:90mm Thickness:1.6mm Bore:25.4mm		2T-方形Rectangle Length:12" / 305mm Width:90mm Thickness:1.6mm Bore:25.4mm
	3T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm		3T-CE Type Dia.:10" / 255mm Thickness:3.0mm Bore:25.4mm
	3T-CE Type Dia.:12" / 305mm Thickness:3.0mm Bore:25.4mm		4T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm
	8T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm		16T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm

## ■ 割草機配件-鎢鋼刀片 TUNGSTEN BLADE

鎢鋼刀片 Blade	規格 Specification	介紹 Instruction
	<b>輕量王 TB-01</b> Size:10**25.4mm*40T T.B. Size 鎢鋼尺寸 ※: 5.5*1.9*2.3mm	四面研磨U型埋入鎢鋼刀刃。本體在保有最大強度的前提下，設計有256個圓孔以減輕重量，與他款刀片比較，減少了2成重量，降到了330g。適用於切割較短的雜草叢。 U type embed welding tungsten blade with 4 angle grinding. Main Blade body has 256 holes to lower down 20% weight to be 330 grams. It is suitable to cut short and young grass.
	<b>牙神 TB-02</b> Size:10**25.4 mm*110T T.B. Size 鎢鋼尺寸 ※: 5.3*1.6*2.0mm	3面研磨J型鎢鋼刀刃。藉由上下交錯焊接“千鳥刃”，以類似手拉鋸的原理，修割竹子或小樹時，可增加排屑，減少摩擦，保持切面光滑。適用於切割竹子或直徑小於80mm的小樹。 J type welding tungsten blade with 3 angle grinding. When we cut the bamboo small tree, "Chidori" tungsten blade which are welded as hand saw, can help to remove wood chips, and reduce friction to have smooth cutting surface. It is suitable to cut bamboo and the trees with Diameter smaller than 80mm.
	<b>狂刀 TB-03</b> Size:10**25.4mm*44T T.B. Size 鎢鋼尺寸 ※: 6.0*2.0*2.3mm	U型埋入鎢鋼刀刃，90度角焊接，鎢鋼刀刃有2/3埋入本體，大幅增加耐衝擊力。階梯式刀片本體設計是以前一個鎢鋼刀刃的刀背保護下一個鎢鋼刀刃，減少每一鎢鋼刀刃受到的衝擊力，以增加刀刃壽命。適用於切割含有小石子的雜草叢。 U type embed welding tungsten blade. 2/3 tungsten blade is embed into main blade body by 90 degree welding to increase impact resistance. Main blade body with ladder shape design, can protect next blade by the last knife back. It can decrease the impact and increase the tungsten blade life. It is suitable for weeds with small stone.
	<b>鋒·靜刃 TB-04</b> Size:10**25.4mm*40T T.B. Size 鎢鋼尺寸 ※: 6.0*2.0*2.3mm	四面研磨U型埋入鎢鋼刀刃。本體表面含有四條消音線，並灌入樹脂，以消音及減震。在兩個鎢鋼刀刃間，均另設有一額外的鋒口，可進行2次切割，以增加切割效率。適用於切割含有小樹的雜草叢。 U type welding tungsten blade with 4 angle grinding. Main Blade body has 4 Resin Noise Reduction Line to lower down vibration and Noise during operating. And there is one extra edge between two tungsten blade to increase cutting efficiency by double cutting. It is suitable for weeds with small branch and shrub.
	<b>獅王 TB-05</b> Size:10**25.4mm*36T T.B. Size 鎢鋼尺寸 ※: 10.5*5.5*2.4mm	三面研磨U型埋入鎢鋼刀刃。此款鎢鋼刀刃較他款增大6倍，耐衝擊、抗磨損，大幅增加工作效率，延長鎢鋼刀刃壽命。適用於切割茶樹、小樹叢、竹子、雜草或是石頭邊緣的草叢。 U type embed welding tungsten blade with 3 angle grinding. The tungsten blade of this model is 6 times bigger than other model to have better impact resistance, wear resistance, and increase working efficiency and tungsten blade life. It is suitable for cut the tea tree, shrub, bamboo, or the weeds near big stone.
	<b>極 TB-06</b> Size:10**25.4mm*40T T.B. Size 鎢鋼尺寸 ※: 6.0*2.0*2.3mm	45度角研磨J型鎢鋼刀刃。45度研磨角和5度焊接角度的鎢鋼刀刃可幫助切割時保持一直線切割，鋒利度集中，大幅增加切割速度，切割面最光滑。適用於不含石子的雜草叢。 J type welding tungsten blade with 45 degree grinding. The tungsten blade with 45 degree grinding angle and 5 degree welding angle can keep cutting in one line to increase cutting speed, and have the smoothest cutting surface. It is suitable for the weeds without any stone.
	<b>強刃 TB-07</b> Size:10**25.4mm*40T T.B. Size 鎢鋼尺寸 ※: 6.0*2.0*2.3mm	後仰式U型埋入鎢鋼刀刃，刀刃有1/3埋入本體，且完全面外，增加工作面積，以提高工作效率。特殊的反彈齒設計可彈出小石子以保護刀刃。適用於切割含有小石子的雜草叢或小樹叢。 Lean back U type embed welding tungsten blade. 1/3 tungsten blade is embed into main body. The tungsten blade edge face outside during operating to increase working surface and have better working efficiency. Special pop tooth design can help to pop stone to protect blade. It is suitable to cut the weeds or shrub with stones.

※ T.B. Size: Tungsten Blade Size

## ■ 割草機配件-割草線 TRIMMER LINE

Category (類別)	Named (名稱)	Shape (線型)	photo (圖片)	Dia. (線徑)	Material (材質)
Standard Series (基礎線)	TRIM'N CUT	Round (圓形)		1.65~4mm 0.065"~0.155"	Nylon 6
	Square CUT	Square (方形)		1.65~4mm 0.065"~0.155"	Nylon 6
Shaped Series (異型線)	Tri-CUT	Triangle (平三角)		1.65~3.3mm 0.065"~0.130"	copolymer
	Star	Pantagon (五角線)		1.65~3.3mm 0.065"~0.130"	copolymer
	HEX-CUT	Hexagon (六角線)		1.65~3.3mm 0.065"~0.130"	copolymer
	Cross Line	Cross (十字)		1.65~3.3mm 0.065"~0.130"	copolymer
	Power Cut	Cross (十字切削)		2.7~4mm 0.105"~0.155"	copolymer
Twist Series (扭曲線)	Mega Twist	Square Twist (四角扭曲)		2.4~4mm 0.095"~0.155"	copolymer
	Star Twist	Pantagon Twist (五角扭曲)		2.4~4mm 0.095"~0.155"	copolymer
Co-extrusion Series (共壓線)	Duo Core	Duo Round (圓形共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
	Duo Square	Duo Square (方形共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
	Duo Pentagon	Duo Pentagon (五角共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
	Duo-Hexagon	Duo Hexagon (六角共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
High Abrasion Resistant Series (耐磨線)	Hybrid Twist	Square Twist (四角扭曲)		1.65~3.3mm 0.065"~0.130"	High Abrasion Resistant Material
	DUO TWIST	Triangle Twist (三角扭曲)		1.65~3.3mm 0.065"~0.130"	High Abrasion Resistant Material

※ The color of trimmer line can be customized base on MOQ. 割草線顏色可客製,但有MOQ限制。

Advantages (優點)					
Price (價格)	Durable (耐用)	Cutting (切削效率)	Abrasion Resistant (耐磨)	Low Noise (降噪)	Patent (專利)
\$	👍				
\$					
\$\$					
\$\$	👍				
\$\$	👍				
\$\$					
\$\$					
\$\$\$					
\$\$\$					
\$\$\$	👍				
\$\$\$	👍				
\$\$\$	👍				
\$\$\$	👍				
\$\$\$	👍 👍				
\$\$\$	👍 👍				


## ■ 割草機配件-割草盤 TRIMMER HEAD

割草盤 Trimmer Head	規格 Specification	割草盤 Trimmer Head	規格 Specification
	TP-01 None Treatment Dia.:Φ110mm Height:24mm Bore:25.4mm		TP-02 Red Painting Dia.:Φ110mm Height:24mm Bore:25.4mm
	TP-03 Sand Blasting Dia.:Φ110mm Height:24mm Bore:25.4mm		TP-04 Vibration Grinding Dia.:Φ110mm Height:24mm Bore:25.4mm
	TP-05 Plastic, Red Dia.:Φ112.5mm Height:24.5mm Bore:25.4mm		TP-06 Vibration Grinding Dia.:Φ119mm Height:20mm Bore:25.4mm
	TP-07 Vibration Grinding Dia.:Φ110mm Height:17.5mm Bore:25.4mm		TP-08 Iron, Painting Dia.:Φ122mm Height:17.5mm Bore:25.4mm
TP-09	TH-01 Full Auto (M)	TH-02 Easy Loader (S)	
			
			
規格 Specification	規格 Specification	規格 Specification	
TP-09 Black Cover Dia.:Φ120mm Height:31.5mm Bore:25.4mm	TH-01 Full Auto (M) Black Cover Dia.: Φ130.3mm, Height: 49mm M10 x 1.25LH (Left Hand Female Shaft) Counterclockwise Rotation With Round White Φ2.4mm x 4m Nylon Line	TH-02 Easy Loader (S) Black Cover Dia.: Φ107mm, Height: 72.5mm M10 x 1.25LH (Left Hand Female Shaft) Counterclockwise Rotation With Round White Φ2.4mm x 4m Nylon Line	

# 高枝鋸/伸縮鋸 SHAFTED SAW CUTTER

## 高枝鋸 SHAFTED SAW CUTTER

## 伸縮鋸 TELESCOPIC SAW CUTTER

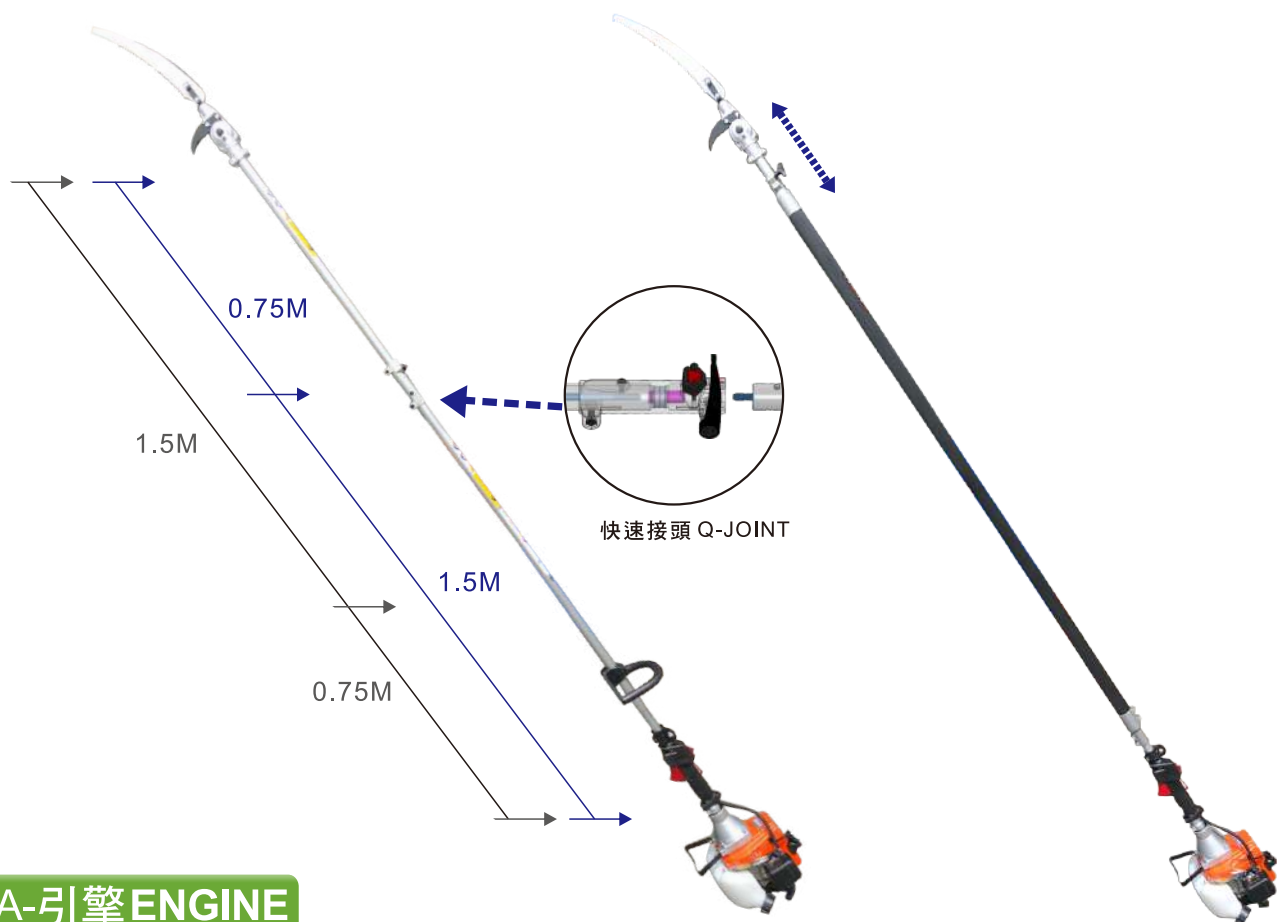

### A-引擎 ENGINE



POWERED by  
**HONDA**™

操作桿型號	Shaft model no.	SSC-2400		SSC-2600	TSC-2600	
操作桿規格	Shaft Specification	24mm*7mm*7T		26mm*7mm*7T		
操作桿長度	Displacement/Power	0.75+1.5M / 1.5M+0.75M			2.4-4.1M	
齒輪箱型號	Fitting Engine	PC-215S				
刀片長度	Saw Blade Length	300mm				
可搭配引擎	Gear case ass'y model	HF-26LT	HT-328LT	TB-33L	GX-25	GX-35
排氣量/功率	Shaft length	25.4 c.c. / 0.87kw	30.5 c.c. / 1.7HP	32.6 c.c. / 1.7HP	25 c.c. / 1.0HP	35.8 c.c. / 1.4HP
油箱容量	Fuel Tank Cap.	0.87 公升 / Liter	1 公升 / Liter	1公升 / Liter	0.58 公升 / Liter	0.63 公升 / Liter
機油箱容量	Oil Tank Capacity				0.08 公升 / Liter	0.1 公升 / Liter

## ■ PC-215S分解圖

