


穩定的動力輸出，多選擇的操作桿，
正確的修剪工具，最佳的工作效率。

Stable Power Output , Wide Selections of Operating Shaft,
Correct Cutting Tool , Best Working Efficiency.




割草機
Brush Cutter

■ 背負式操作桿設定 KNAPSACK TYPE SHAFT SETTING

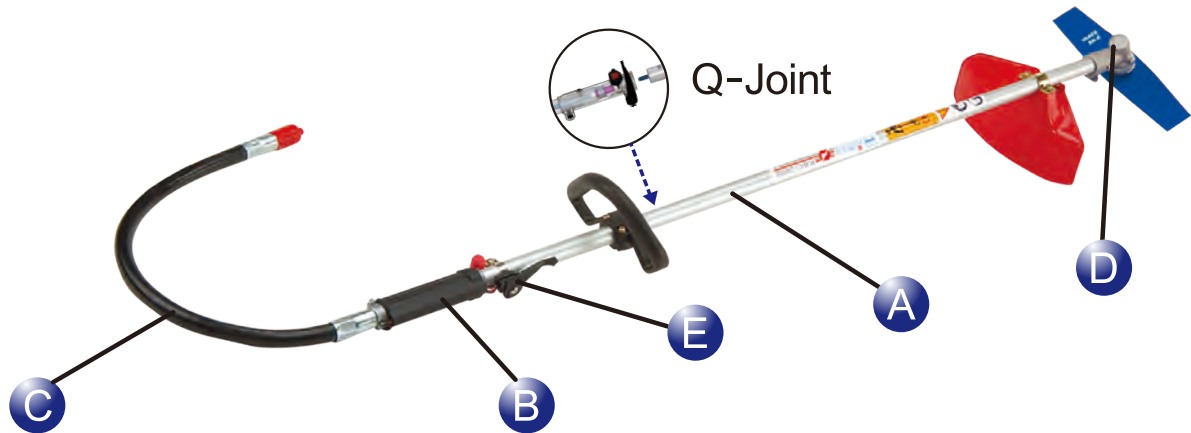


A-鋁管 & 傳動軸設定 PIPE & DRIVE SHAFT SETTING

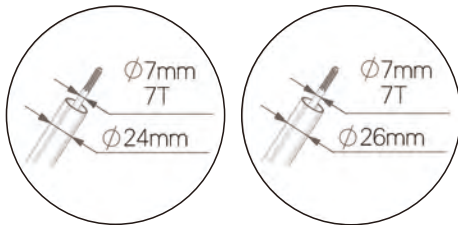

B-繼手設定

PIPE HANDLE SETTING

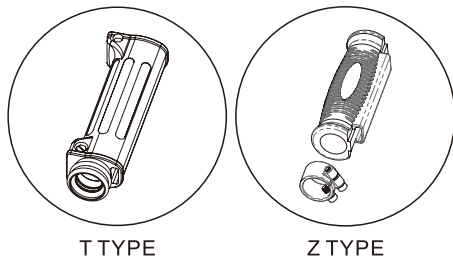

T TYPE

Z TYPE

C-軟管設定

FLEXIBLE SHAFT SETTING



- a T TYPE $\Phi 25.4 \times \Phi 25.4\text{mm}$ 720*745mm
- b T TYPE $\Phi 25.4 \times \Phi 25.4\text{mm}$ 880*905mm
- c Z TYPE $\Phi 25.4 \times \Phi 22.8\text{mm}$ 840*845mm
- d Z TYPE $\Phi 25.4 \times \Phi 20.8\text{mm}$ 840*845mm

E-加油器 THROTTLE LEVER



R6


 $\Phi 26$
D型
D Type

 $\Phi 26$
J型
J Type

 $\Phi 24/26$
F型
F Type

J-S WITH STOP SWITCH 附停止開關
J-E WITHOUT STOP SWITCH 不附停止開關

D-齒輪箱 GEAR CASE

24F

 $\Phi 24\text{mm}$
7T*15T
10T*20T

24K

 $\Phi 24\text{mm}$
7T*13T
10T*19T

26B

 $\Phi 26\text{mm}$
7T*14T
10T*18T

26C

 $\Phi 26\text{mm}$
7T*16T
10T*20T

26F

 $\Phi 26\text{mm}$
7T*15T
10T*20T

26H


 $\Phi 26\text{mm}$
7T*14T
10T*19T

■ 肩掛式操作桿設定 SHOULDER TYPE SHAFT SETTING

A-外缸CLUTCH CASE






 R4
Φ28mm

 R5
Φ26/28mm

 B
Φ26/28mm

 C
Φ24/26mm

 F
Φ24/26mm

B-鋁管 & 傳動軸設定 PIPE & DRIVE SHAFT SETTING



C-齒輪箱 GEAR CASE


 24F
Φ24mm
7T*15T
10T*20T

 24K
Φ24mm
7T*13T
10T*19T

 26B
Φ26mm
7T*14T
10T*18T

 26C
Φ26mm
7T/9T*16T
10T*20T

 26F
Φ26mm
7T*15T
10T*20T

 26H
Φ26mm
7T*14T
10T*19T

 28B
Φ28mm
9T*14T
Φ10*17T

 28C
Φ28mm
9T*15T
13T*20T

 28F
Φ28mm
9T*15T
10T*20T

D-加油器 THROTTLE LEVER


 Φ18/19
A型
A Type

 Φ18/19
B型
B Type

 Φ18
D型
D Type

 R4型
R4 Type

 Φ19
E型
E Type

 Φ24/26/28
F型
F Type

 Φ26
L型
L Type

E-背帶 HARNESS


 單背帶 A
Single Band A

 單背帶 B
Single Band B

 彈簧單背帶 A
Spring Single Band A

 減震彈簧
Cushion Spring

 彈簧單背帶 B
Spring Single Band B

 緩壓肩墊
Mitigation Shoulder Pad

 雙背帶 A
Double Harness A

 雙背帶 B
Double Harness B

 雙背帶 C
Double Harness C

■ 軟桿型號規格 KNAPSACK TYPE SHAFT MODEL

軟桿型號	Shaft Model	KBC-2400			KBC-2600		
齒輪箱	Gear Case	24K / 24F			26B / 26C / 26F / 26H		
操作桿形式	Shaft Type	T Type	Z Type	K Type	T Type	Z Type	K Type
搭配外缸	Clutch Housing	A3	A6	K1	A3	A6	K1
外缸孔徑	Diameter Of Clutch Housing	Φ25.4mm	Φ25.4mm	Φ29mm	Φ25.4mm	Φ25.4mm	Φ29mm
操作桿孔徑	Diameter Of Clutch Housing	Φ25.4mm	Φ21mm	Φ29mm	Φ25.4mm	Φ23mm	Φ29mm
軟管長度外管	Length Of Flexible Shaft	880mm	840mm	880mm	880mm	840mm	880mm
軟管長度內心	Length Of Flexible Liner	905mm	845mm	895mm	905mm	845mm	895mm
鋁管長度	Pipe Length	Φ24*1290mm	Φ24*1495mm	Φ24*1375mm	Φ26*1290mm	Φ26*1495mm	Φ26*1375mm
軸心長度	Length Of Drive Shaft	Φ7*1400mm	Φ7*1500mm	Φ7*1445mm	Φ7*1400mm	Φ7*1500mm	Φ7*1445mm
齒部	Drive Tooth	Φ7*□*7T			Φ7*□*7T		
加油器種類	Throttle Lever	R6 / D Type / J Type / F Type					
兩截式桿組	Q-Joint	選配 Option					

■ 硬桿型號規格 SHOULDER TYPE SHAFT MODEL

硬桿型號	Shaft Model	SBC-2400		SBC-2600		RBC-5600	RBC-5800	RBC-4800	
齒輪箱	Gear Case	24K / 24F		26B / 26C / 26F / 26H			28B/28C/28F	28B/28C/28F	
操作形式	Handle Type	U Type	T Type	U Type	T Type	Φ26*1500mm			
加油器種類	Throttle Lever	R4/A/B/D/E Type	F / L Type	R4/A/B/D/E Type	F/L Type	R4/A/B/D/E Type			
搭配外缸	Clutch Housing	C Type	F Type	B Type		R5 Type	R5 Type	R4 Type	
鋁管長度	Pipe Length	Φ24*1510mm	Φ24*1500mm	Φ26*1500mm		Φ28*1500mm	Φ28*1400mm	Φ28*1510mm	
軸心長度	Length Of Drive Shaft	Φ7*1545mm		Φ7*1545mm		Φ7*1545mm	Φ8*1545mm	Φ8*1435mm	Φ8*1545mm
齒部	Drive Tooth	Φ7*7T*7T		Φ7*7T*7T		Φ7*7T*7T	Φ8*9T*9T	Φ8*9T*9T	
兩截式桿組	Q-Joint	選配 Option							

■ 背負式割草機 KNAPSACK BRUSH CUTTER

HT-328/358 背負式割草機 KNAPSACK BRUSH CUTTER



引擎型號	Engine Model	HT-328	HT-358
排氣量/功率	Displacement/Power	30.5 c.c. / 1.7HP	34 c.c. / 1.9HP
化油器形式	Carburetor Type	浮筒式 Float Type	
背架款式	Frame Type	A2	
油箱容量	Fuel Tank Cap.	1.3 公升 / Liter	

TB-33/43 背負式割草機 KNAPSACK BRUSH CUTTER



引擎型號	Engine Model	TB-33	TB-43
排氣量/功率	Displacement/Power	32.6 c.c. / 1.7HP	42.7 c.c. / 2.1HP
化油器形式	Carburetor Type	浮筒式 Float Type	
背架款式	Frame Type	A3	
油箱容量	Fuel Tank Cap.	1.3 公升 / Liter	

G-35/45 背負式割草機 KNAPSACK BRUSH CUTTER



引擎型號	Engine Model	G-35	G-45
排氣量/功率	Displacement/Power	32.6 c.c. / 1.7HP	41.5 c.c. / 2.2HP
化油器形式	Carburetor Type	浮筒式 Float Type	
背架款式	Frame Type	A6	
油箱容量	Fuel Tank Cap.	1.3 公升 / Liter	

■ 背負式割草機 KNAPSACK BRUSH CUTTER

NB-411 背負式割草機 KNAPSACK BRUSH CUTTER



引擎型號	Engine Model	NB-411
排氣量/功率	Displacement/Power	40.2 c.c. / 2.0HP
化油器形式	Carburetor Type	浮筒式 Float Type
背架款式	Frame Type	A4
油箱容量	Fuel Tank Cap.	0.8 公升 / Liter

EC-04 背負式割草機 KNAPSACK BRUSH CUTTER



引擎型號	Engine Model	EC-04
排氣量/功率	Displacement/Power	40.2 c.c. / 2.0HP
化油器形式	Carburetor Type	浮筒式 Float Type
背架款式	Frame Type	A4
油箱容量	Fuel Tank Cap.	0.88 公升 / Liter

GX-35/50 背負式割草機 KNAPSACK BRUSH CUTTER



POWERED by
HONDA™

引擎型號	Engine Model	GX-35	GX-50
排氣量/功率	Displacement/Power	35.8 c.c. / 1.4HP	47.9 c.c. / 2HP
化油器形式	Carburetor Type	膜片式 Diaphragm Type	
背架款式	Frame Type	A4	
油箱容量	Fuel Tank Cap.	0.63 公升 / Liter	
機油容量	Oil Capacity	0.1 公升 / Liter	0.13 公升 / Liter

■ 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

HF-26L 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

引擎型號	Engine Model	HF-26L
排氣量/功率	Displacement / Power	25.4 c.c. / 0.87 kw
化油器形式	Carburetor Type	膜片式 Diaphragm Type
油箱容量	Fuel Tank Cap.	0.87 公升 / Liter
握把形式	Handle Type	D Type / U Type



HT-328L/358L 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

引擎型號	Engine Model	HT-328LT	HT-358LT
排氣量/功率	Displacement / Power	30.5 c.c. / 1.7HP	34 c.c. / 1.9HP
化油器形式	Carburetor Type	膜片式 Diaphragm Type	
油箱容量	Fuel Tank Cap.	1 公升 / Liter	
握把形式	Handle Type	D Type / U Type	




TB-33L/43L/52L 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

引擎型號	Engine Model	TB-33LT	TB-43LT	TB-52LT
排氣量/功率	Displacement / Power	32.6 c.c. / 1.7HP	42.7 c.c. / 2.1HP	51.7 c.c. / 2.3HP
化油器形式	Carburetor Type	膜片式 Diaphragm Type		
油箱容量	Fuel Tank Cap.	1 公升 / Liter		
握把形式	Handle Type	D Type / U Type		



■ 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

G-35L/45L 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

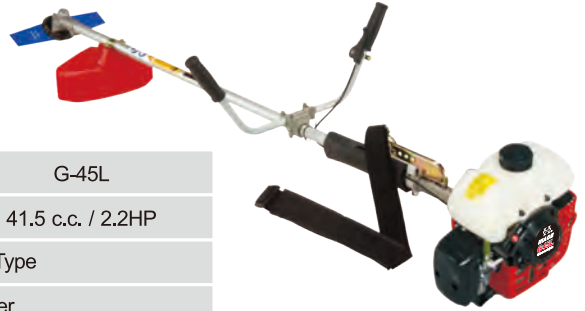

引擎型號	Engine Model	G-35L	G-45L
排氣量/功率	Displacement / Power	32.6 c.c. / 1.7HP	41.5 c.c. / 2.2HP
化油器形式	Carburetor Type	浮筒式 Float Type	
油箱容量	Fuel Tank Cap.	0.8 公升 / Liter	
握把形式	Handle Type	U Type	

G-4LS 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER



引擎型號	Engine Model	G-4LS
排氣量/功率	Displacement / Power	41.5 c.c. / 2.2HP
化油器形式	Carburetor Type	膜片式 Diaphragm Type
油箱容量	Fuel Tank Cap.	1 公升 / Liter
握把形式	Handle Type	D Type / U Type

GX-35/50 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

POWERED by
HONDA™



引擎型號	Engine Model	GX-25	GX-35	GX-50
排氣量/功率	Displacement / Power	25 c.c. / 1.0HP	35.8 c.c. / 1.4HP	47.9 c.c. / 2HP
化油器形式	Carburetor Type	膜片式 Diaphragm Type		
油箱容量	Fuel Tank Cap.	0.58 公升 / Liter	0.63 公升 / Liter	
機油容量	Oil Capacity	0.08 公升 / Liter	0.1 公升 / Liter	0.13 公升 / Liter
握把形式	Handle Type	D Type / U Type		

■ 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

NB-411 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

引擎型號	Engine Model	NB-411
排氣量/功率	Displacement / Power	40.2 c.c. / 2.0HP
化油器形式	Carburetor Type	浮筒式 Float Type
油箱容量	Fuel Tank Cap.	0.8 公升 / Liter
握把形式	Handle Type	U Type



EC-04 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

引擎型號	Engine Model	EC-04
排氣量/功率	Displacement / Power	40.2 c.c. / 2.0HP
化油器形式	Carburetor Type	浮筒式 Float Type / 膜片式 Diaphragm Type
油箱容量	Fuel Tank Cap.	0.88 公升 / Liter
握把形式	Handle Type	U Type



HT-200 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER

引擎型號	Engine Model	HT-200
排氣量/功率	Displacement / Power	39.4 c.c. / 2.0HP
化油器形式	Carburetor Type	浮筒式 Float Type
油箱容量	Fuel Tank Cap.	0.7 公升 / Liter
握把形式	Handle Type	U Type



TD-40 肩掛式割草機 SHOULDER TYPE BRUSH CUTTER


引擎型號	Engine Model	TD-40
排氣量/功率	Displacement / Power	40.2 c.c. / 2.1HP
化油器形式	Carburetor Type	浮筒式 Float Type
油箱容量	Fuel Tank Cap.	1 公升 / Liter
握把形式	Handle Type	U Type



■ 高枝鋸/伸縮鋸 SHAFTED SAW CUTTER

高枝鋸 SHAFTED SAW CUTTER

伸縮鋸 TELESCOPIC SAW CUTTER

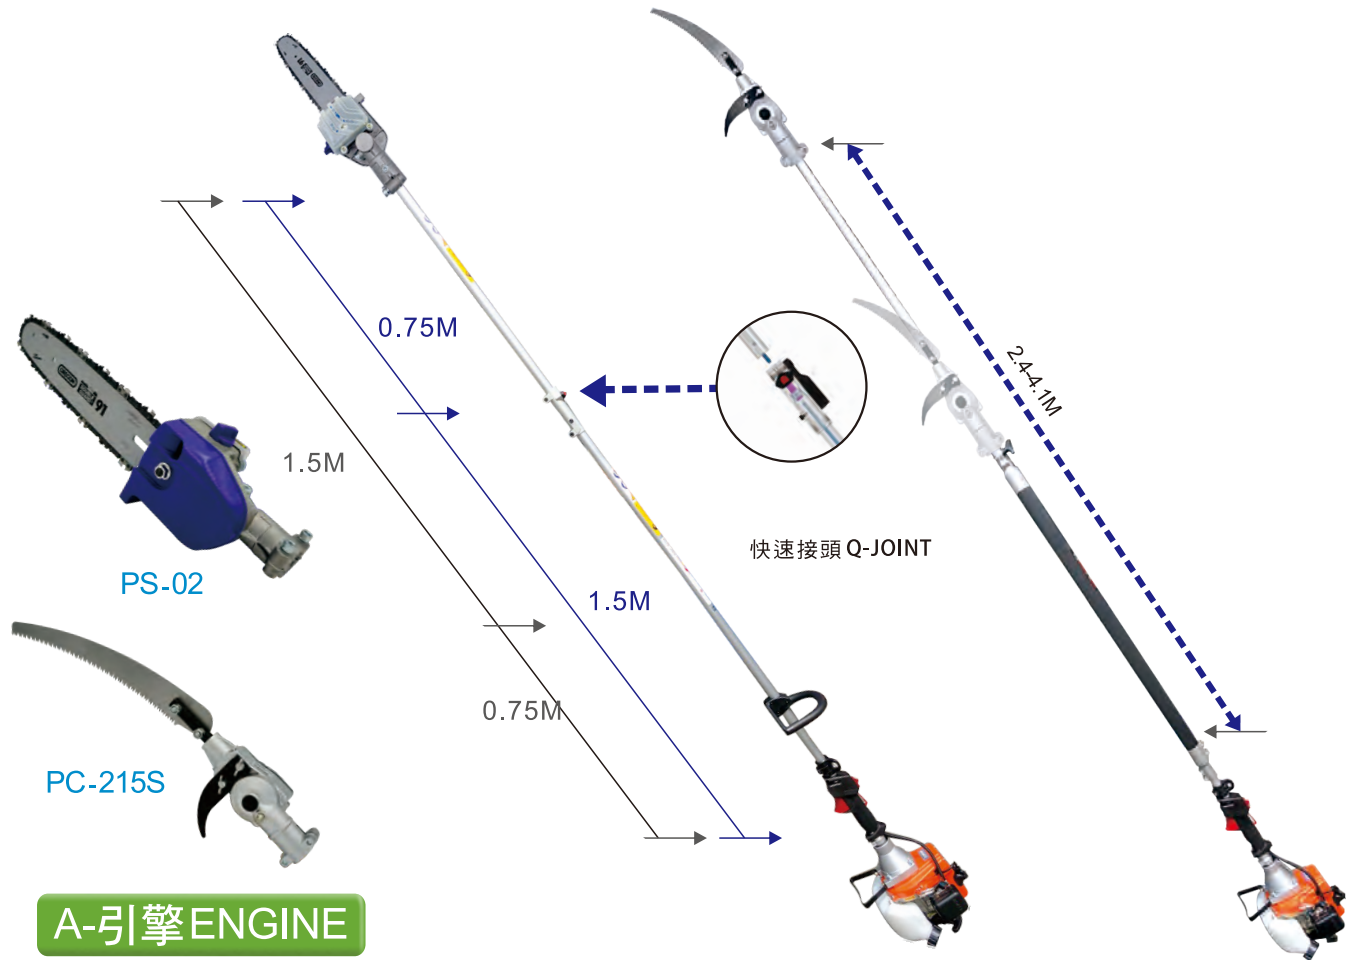

A-引擎 ENGINE




POWERED by
HONDA™

操作桿型號	Shaft model no.	SSC-2400		SSC-2600	TSC-2600
操作桿規格	Shaft Specification	24mm*7mm*7T		26mm*7mm*7T	
操作桿長度	Shaft Length	0.75+1.5M / 1.5M+0.75M			2.4-4.1M
齒輪箱型號	Gear Case Model	PC-215S		PS-02	
規格	Specification	鋸片 300mm SAW BLADE		鏈條SAW CHAIN 10"*91PX*40DL / 機油SAW OIL 160ml	
可搭配引擎	Gear case ass'y model	HF-26LT	HT-328LT	TB-33L	GX-25 GX-35
排氣量/功率	Shaft length	25.4 c.c. / 0.87kw	30.5 c.c. / 1.7HP	32.6 c.c. / 1.7HP	25 c.c. / 1.0HP 35.8 c.c. / 1.4HP
油箱容量	Fuel Tank Cap.	0.87 公升/Liter	1 公升/Liter	1 公升/Liter	0.58 公升/Liter 0.63 公升 / Liter
機油箱容量	Oil Tank Capacity				0.08 公升/Liter 0.1 公升/Liter


高枝綠籬機 SHAFTED HEDGE TRIMMER

SHT-2400/2600-SR/LR

選配 OPTIONAL



鍍鉻白刀
CHROME COATING

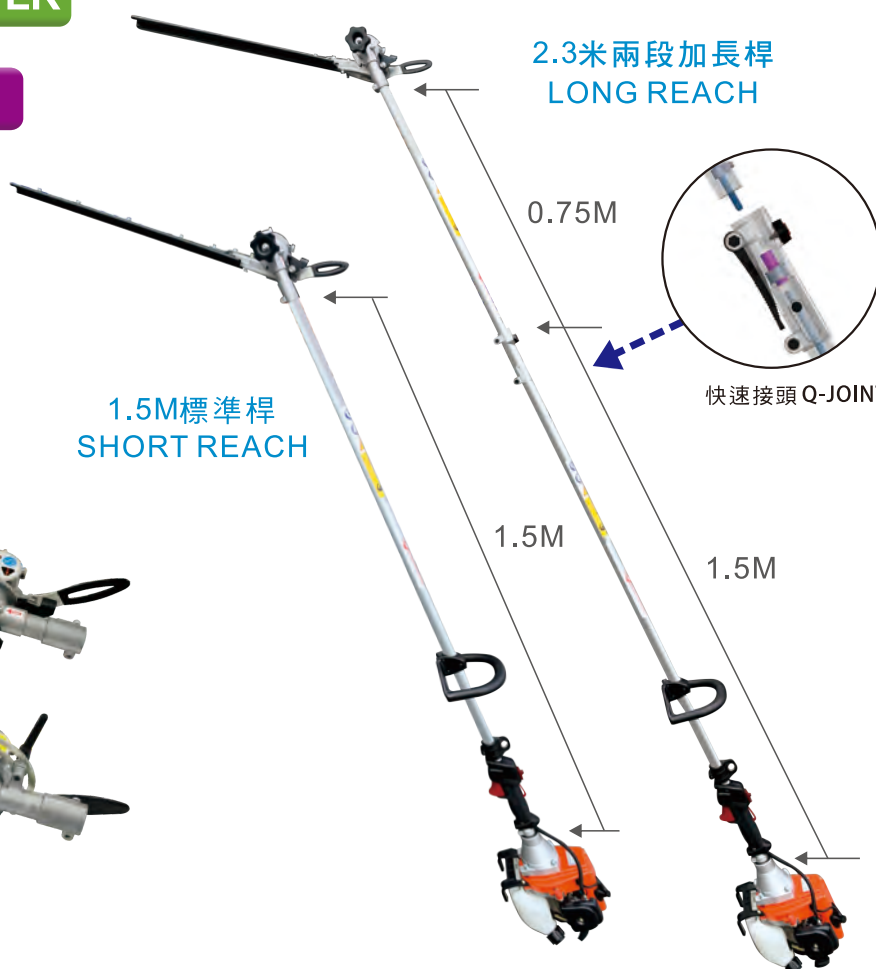

2.3米兩段加長桿
LONG REACH

0.75M

快速接頭 Q-JOINT

1.5M標準桿
SHORT REACH

1.5M

1.5M



專業型
PT-01



輕量家用型
PT-02

A-引擎 ENGINE



POWERED by
HONDA™

操作桿型號	Shaft model no.	SHT-2400-SR		SHT-2600-SR		SHT-2600-LR	
操作桿規格	Shaft Specification	24mm*7mm*7T		26mm*7mm*7T			
操作桿長度	Shaft Length	1.5M			1.5M+0.75M		
齒輪箱型號	Gear Case Model	PT-01			PT-02		
可調整角度	Adjustable Angle	Upper 48° ,Lower 84°			Upper 45° ,Lower 45°		
刀片長度	Blade Length	536mm			400mm		
刀片齒距	Blade Pitch	35mm			30mm		
可搭配引擎	Gear case ass'y model	HF-26LT	HT-328LT	TB-33L	GX-25	GX-35	
排氣量/功率	Shaft length	25.4 c.c. / 0.87kw	30.5 c.c. / 1.7HP	32.6 c.c. / 1.7HP	25 c.c. / 1.0HP	35.8 c.c. / 1.4HP	
油箱容量	Fuel Tank Cap.	0.87 公升 / Liter	1 公升 / Liter	1 公升 / Liter	0.58 公升 / Liter	0.63 公升 / Liter	
機油箱容量	Oil Tank Capacity				0.08 公升 / Liter	0.1 公升 / Liter	

■ 簡易手推割草機 HAND PUSH MOWER

HPM-425 簡易手推割草機 HAND PUSH MOWER



POWERED by
HONDA™















型號	Model	HPM-425				
引擎型號	Engine Model	TB-43LT	TB-52LT	G-4LS	GX-35	GX-50
排氣量/功率	Displacement / Power	42.7 c.c. / 2.1HP	51.7 c.c. / 2.3HP	41.5 c.c. / 2.2HP	35.8 c.c. / 1.4HP	47.9 c.c. / 2.0HP
化油器形式	Carburetor Type	膜片式 Diaphragm Type				
油箱容量	Fuel Tank Cap.	1 公升 / Liter			0.63 公升 / Liter	0.63 公升 / Liter
機油箱容量	Oil Tank Capacity				0.1 公升 / Liter	0.13 公升 / Liter
握把形式	Handle Type	R4 Type / D Type				

■ 割草機配件-割草盤 TRIMMER HEAD








割草盤 Trimmer Head	規格 Specification	割草盤 Trimmer Head	規格 Specification
	TP-02 Red Painting Dia.:Φ110mm Height:24mm Bore:25.4mm		TP-03 Sand Blasting Dia.:Φ110mm Height:24mm Bore:25.4mm
	TP-05 Plastic, Red Dia.:Φ112.5mm Height:24.5mm Bore:25.4mm		TP-07 Vibration Grinding Dia.:Φ110mm Height:17.5mm Bore:25.4mm
	TP-08 Iron, Painting Dia.:Φ122mm Height:17.5mm Bore:25.4mm		TP-09 Sand Blasting Dia.:Φ108.3mm Height:17.4mm Bore:25.4mm
	 V型除草繩 除青苔、清石縫 四繩牛筋盤 雙繩牛筋盤 刀片除草滑行者 四繩牛筋盤 刀片除草滑行者 雙繩牛筋盤	TP-10 Sand Blasting Dia.:Φ109.6mm Height:25mm Bore:25.4mm	

TP-11	TH-01 Full Auto (M)	TH-02 Easy Loader (S)
規格 Specification	規格 Specification	規格 Specification
TP-11 Black Cover Dia.:Φ120mm Height:31.5mm Bore:25.4mm	TH-01 Full Auto (M) Black Cover Dia.: Φ130.3mm, Height: 49mm M10 x 1.25LH (Left Hand Female Shaft) Counterclockwise Rotation With Round White Φ2.4mm x 4m Nylon Line	TH-02 Easy Loader (S) Black Cover Dia.: Φ107mm, Height: 72.5mm M10 x 1.25LH (Left Hand Female Shaft) Counterclockwise Rotation With Round White Φ2.4mm x 4m Nylon Line

■ 割草機配件-割草刀片 TRIMMER BLADE
















刀片 Blade	規格 Specification	刀片 Blade	規格 Specification
	2T-菱形Diamond Length:10" / 255mm Width:70mm Thickness:1.6mm Bore:25.4mm		2T-菱形Diamond Length:12" / 305mm Width:70mm Thickness:1.6mm Bore:25.4mm
	2T-菱形Diamond Length:10" / 255mm Width:90mm Thickness:1.6mm Bore:25.4mm		2T-菱形Diamond Length:12" / 305mm Width:90mm Thickness:1.6mm Bore:25.4mm
	2T-方形Rectangle Length:10" / 255mm Width:70mm Thickness:1.6mm Bore:25.4mm		2T-方形Rectangle Length:12" / 305mm Width:70mm Thickness:1.6mm Bore:25.4mm
	2T-方形Rectangle Length:10" / 255mm Width:90mm Thickness:1.6mm Bore:25.4mm		2T-方形Rectangle Length:12" / 305mm Width:90mm Thickness:1.6mm Bore:25.4mm
	3T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm		3T-CE Type Dia.:10" / 255mm Thickness:3.0mm Bore:25.4mm
	3T-CE Type Dia.:12" / 305mm Thickness:3.0mm Bore:25.4mm		4T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm
	8T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm		16T Dia.:10" / 255mm Thickness:1.4mm Bore:25.4mm

■ 割草機配件-鎢鋼刀片 TUNGSTEN BLADE

鎢鋼刀片 Blade	規格 Specification	介紹 Instruction
	TB-01 輕量王 Size:10"X25.4mmX40T T.B. Size 鎢鋼尺寸※: 5.5X1.9X2.3mm	四面研磨U型埋入鎢鋼刀刃。本體在保有最大強度的前提下，設計有256個圓孔以減輕重量，與他款刀片比較，減少了2成重量，降到了330g。適用於切割較短的雜草叢。 U type embed welding tungsten blade with 4 angle grinding. Main Blade body has 256 holes to lower down 20% weight to be 330 grams. It is suitable to cut short and young grass.
	40刃	
	TB-02 牙神 Size:10"X25.4 mmX110T T.B. Size 鎢鋼尺寸※: 5.3X1.6X2.0mm	3面研磨J型鎢鋼刀刃。藉由上下交錯焊接"千鳥刃"，以類似手拉鋸的原理，修割竹子或小樹時，可增加排屑，減少摩擦，保持切面光滑。適用於切割竹子或直徑小於80mm的小樹。 J type welding tungsten blade with 3 angle grinding. When we cut the bamboo small tree, "Chidori" tungsten blade which are welded as hand saw, can help to remove wood chips, and reduce friction to have smooth cutting surface. It is suitable to cut bamboo and the trees with Diameter smaller than 80mm.
	110刃	
	TB-03 狂刀 Size:10"X25.4mmX44T T.B. Size 鎢鋼尺寸※: 6.0X2.0X2.3mm	U型埋入鎢鋼刀刃，90度角焊接，鎢鋼刀刃有2/3埋入本體，大幅增加耐衝擊力。階梯式刀片本體設計是以前一個鎢鋼刀刃的刀背保護下一個鎢鋼刀刃，減少每一鎢鋼刀刃受到的衝擊力，以增加刀刃壽命。適用於切割含有小石子的雜草叢。 U type embed welding tungsten blade. 2/3 tungsten blade is embed into main blade body by 90 degree welding to increase impact resistance. Main blade body with ladder shape design, can protect next blade by the last knife back. It can decrease the impact and increase the tungsten blade life. It is suitable for weeds with small stone.
	44刃	
	TB-04 鋒·靜刃 Size:10"X25.4mmX40T T.B. Size 鎢鋼尺寸※: 6.0X2.0X2.3mm	四面研磨U型埋入鎢鋼刀刃。本體表面含有四條消音線，並灌入樹脂，以消音及減震。在兩個鎢鋼刀刃間，均另設有一額外的鋒口，可進行2次切割，以增加切割效率。適用於切割含有小樹的雜草叢。 U type welding tungsten blade with 4 angle grinding. Main Blade body has 4 Resin Noise Reduction Line to lower down vibration and Noise during operating. And there is one extra edge between two tungsten blade to increase cutting efficiency by double cutting. It is suitable for weeds with small branch and shrub.
	40刃	
	TB-05 獅王 Size:10"X25.4mmX36T T.B. Size 鎢鋼尺寸※: 10.5X5.5X2.4mm	三面研磨U型埋入鎢鋼刀刃。此款鎢鋼刀刃較他款增大6倍，耐衝擊、抗磨損，大幅增加工作效率，延長鎢鋼刀刃壽命。適用於切割茶樹、小樹叢、竹子、雜草或是石頭邊緣的草叢。 U type embed welding tungsten blade with 3 angle grinding. The tungsten blade of this model is 6 times bigger than other model to have better impact resistance, wear resistance, and increase working efficiency and tungsten blade life. It is suitable for cut the tea tree, shrub, bamboo, or the weeds near big stone.
	36刃	
	TB-06 極 Size:10"X25.4mmX40T T.B. Size 鎢鋼尺寸※: 6.0X2.4X2.3mm	45度角研磨J型鎢鋼刀刃。45度研磨角和5度焊接角度的鎢鋼刀刃可幫助切割時保持一直線切割，鋒利度集中，大幅增加切割速度，切割面最光滑。適用於不含石子的雜草叢。 J type welding tungsten blade with 45 degree grinding. The tungsten blade with 45 degree grinding angle and 5 degree welding angle can keep cutting in one line to increase cutting speed, and have the smoothest cutting surface. It is suitable for the weeds without any stone.
	40刃	
	TB-07 強刃 Size:10"X25.4mmX40T T.B. Size 鎢鋼尺寸※: 6.0X2.0X2.3mm	後仰式U型埋入鎢鋼刀刃，刀刃有1/3埋入本體，且完全面外，增加工作面積，以提高工作效率。特殊的反彈齒設計可彈出小石子以保護刀刃。適用於切割含有小石子的雜草叢或小樹叢。 Lean back U type embed welding tungsten blade. 1/3 tungsten blade is embed into main body. The tungsten blade edge face outside during operating to increase working surface and have better working efficiency. Special pop tooth design can help to pop stone to protect blade. It is suitable to cut the weeds or shrub with stones.
	40刃	

※ T.B. Size: Tungsten Blade Size

■ 割草機配件-割草線 TRIMMER LINE

Category (類別)	Name (名稱)	Shape (線型)	photo (圖片)	Dia. (線徑)	Material (材質)
Standard Series (基礎線)	TRIM'N CUT	Round (圓形)		1.65~4mm 0.065"~0.155"	Nylon 6
	Square CUT	Square (方形)		1.65~4mm 0.065"~0.155"	Nylon 6
Shaped Series (異型線)	Tri-CUT	Triangle (平三角)		1.65~3.3mm 0.065"~0.130"	copolymer
	Star	Pantagon (五角線)		1.65~3.3mm 0.065"~0.130"	copolymer
	HEX-CUT	Hexagon (六角線)		1.65~3.3mm 0.065"~0.130"	copolymer
	Cross Line	Cross (十字)		1.65~3.3mm 0.065"~0.130"	copolymer
	Power Cut	Cross (十字切削)		2.7~4mm 0.105"~0.155"	copolymer
Twist Series (扭曲線)	Mega Twist	Square Twist (四角扭曲)		2.4~4mm 0.095"~0.155"	copolymer
	Star Twist	Pantagon Twist (五角扭曲)		2.4~4mm 0.095"~0.155"	copolymer
Co-extrusion Series (共壓線)	Duo Core	Duo Round (圓形共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
	Duo Square	Duo Square (方形共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
	Duo Pentagon	Duo Pentagon (五角共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
	Duo-Hexagon	Duo Hexagon (六角共壓)		1.65~3.3mm 0.065"~0.130"	copolymer
High Abrasion Resistant Series (耐磨線)	Hybrid Twist	Square Twist (四角扭曲)		1.65~3.3mm 0.065"~0.130"	High Abrasion Resistant Material
	DUO TWIST	Triangle Twist (三角扭曲)		1.65~3.3mm 0.065"~0.130"	High Abrasion Resistant Material

※ The color of trimmer line can be customized base on MOQ. 割草線顏色可客製,但有MOQ限制。